

TAMKO® TWP-2

Water-Based Waterproofing Primer

PRODUCT DATA

DESCRIPTION

TAMKO® TWP-2 is a high quality, rubberized, water-based primer, formulated for the professional waterproofing contractor.

USES

Provides maximum bond to asphalt, concrete, masonry and metal surfaces.

APPLICATION

Apply with a long nap roller or spray equipment at the rate of 350 to 400 square feet per gallon. Allow to cure until it will not transfer when touched. Primer should be allowed to dry a minimum of 1 hour, and a maximum of 2 hours. In high humidity areas an overnight cure may be necessary.


LIMITATIONS

Primer should be stored in a weather protected environment at temperatures above 32° F. Do not allow primer to freeze.

TYPICAL PHYSICAL PROPERTIES*

Property	Typical Value
Weight per Gallon	8.38 lbs
Solids Content	28% by weight
Tack Free Time	45 min. @ 75°F
Flash Point	N/A
Packaging	5 gallon pails
VOC	Less than 50 grams/litre

*All values stated as nominal at time of manufacture.

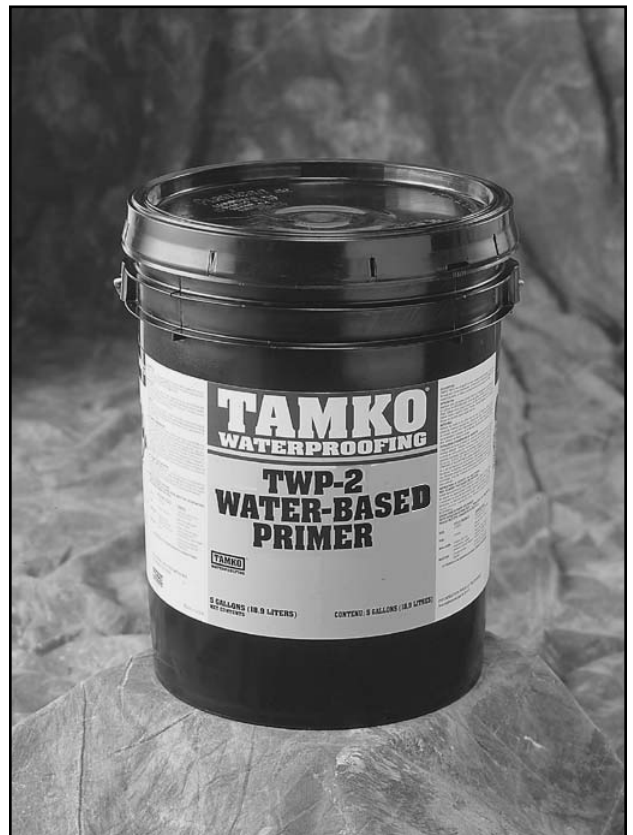

MIX THOROUGHLY BEFORE USING

For safety, health, and handling information contact TAMKO at 800-641-4691 ext. 51 for Material Safety Data Sheets (MSDS).

©2006 TAMKO Roofing Products, Inc. TAMKO® is a registered trademark of TAMKO Roofing Products, Inc.

www.tamko.com

Corporate	220 West 4th Street, Joplin, Missouri 64801	800-641-4691
Central District	220 West 4th Street, Joplin, Missouri 64801	800-641-4691
Northeast District	4500 Tamko Drive, Frederick, Maryland 21701	800-368-2055
Southeast District	2300 35th Street, Tuscaloosa, Alabama 35401	800-228-2656
Southwest District	7910 South Central Expressway, Dallas, Texas 75216	800-443-1834
Western District	5300 East 43rd Avenue, Denver, Colorado 80216	800-530-8868

